


PVC Marker Tubes



Wiring Simplified

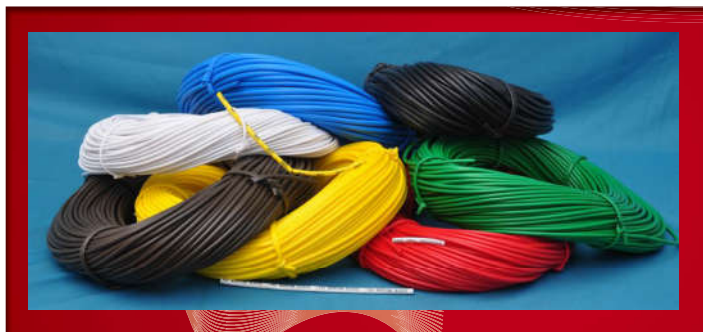

Quality Certification For
PVC Marker Tubes



Material: Made from premium Heavy Metals free ROHS compliant PVC compound developed In-house by SGI.

Widely used for Printing Markers on all types of Ferrule printing of reputed makes

- Unique round profile for customized cable and wire marking.
- Reduces marking costs in projects for frequent, fast and late stage alterations.
- Fast to use bulk reel and box format

Item No.	Inner Diameter (in mm)	Wall Thickness (in mm)	Standard Packing 100 Mtr Roll	Suitable for wire size
MS2.2	2.20	0.35	"	0.5 sq.mm
MS2.5	2.50	0.35	"	0.5-0.75 sq.mm
MS3.0	3.00	0.40	"	1.0-1.5 sq.mm
MS3.2	3.20	0.40	"	1.0-1.5 sq.mm
MS3.5	3.50	0.45	"	2.5 sq.mm
MS4.0	4.00	0.45	"	2.5-4.0 sq mm
MS4.2	4.20	0.45	"	4 sq.mm
MS4.5	4.50	0.45	"	4.0 sq.mm
MS5.0	5.00	0.45	"	4.0-6.0 sq.mm
MS5.2	5.20	0.45	"	6.0 sq.mm
MS5.5	5.50	0.50	"	6.0 sq.mm
MS6.0	6.00	0.50	"	6.0-10.0 sq.mm
MS7.0	7.00	0.50	"	10.0 sq.mm
MS8.0	8.00	0.50	"	16.0 sq.mm
MS9.0	9.00	0.50	"	16.0 sq.mm
MS10.0	10.00	0.50	"	25 sq.mm
MS12.0	12.00	0.60	"	35 sq.mm

Standard Colors: White & yellow

Other sizes of different inner diameters, wall thickness and colors are available on request

AVAILABLE IN different packing's like POLYBAG, CORRUGATED REEL & CORRUGATED BOX.

Performance of Marker Tube:

Ultimate Elongation: 275%

Tensile strength: 15.50 N/mm²

Temperature Range: -20 Deg C to +85 Deg C